

VertiCable™

MADE IN THE U.S.A. 



Welcome Home

Contemporary vertical cables provide virtually unobstructed views





VertiCable™ Style C80

Contemporary vertical cables and balusters provide architectural style with a virtually unobstructed view. Sections are factory assembled and tensioned, shipped on pallets ready for quick installation. VertiCable™ hardware mirrors Westbury C-Series products providing consistent design, performance and configuration for the contractor or builder. Available in 12 standard AAMA architectural colors, see details at right.

C80

SPECIFICATIONS

- Section Heights: 36", 42"
- Section Lengths: 4', 5', 6', 8'
- Stair Rail Lengths C101 Only: 4', 5', 6', 7', 8'
- C80 Baluster: 9/16" round x (.156" wall)
- Baluster Spacing: 3.75" c/c
- Stylish Top Rail: 1-3/4" w (.090") x 1-3/8" t (.085")
- Bottom Rail: 1-3/4" w (.090") x 1-1/4" t (.120")
- 1/8" Stainless Steel Cable with Fasteners
- Bottom Rail Support: 8"

NOTE: End spacing may vary by length.



Style: C80 With Level Crossover Post Offers a Contemporary and Seamless Look. Works well with Westbury Drink Rail. Color: Bronze Fine Texture

VertiCable™ Gates



Style: C80 Gates in 36" and 48" widths.



drink rail



- Easily Attaches to Westbury C-Series Crossover Post System
- Solid Wall Construction for Strength & Durability

Style: C80 With Level Crossover Post Offers a Contemporary and Seamless Look. Works well with Westbury Drink Rail.
Color: Bronze Fine Texture

Exclusive DSI Powder Coating Process

AAMA 2604 & AAMA 2605




Verified AAMA 2604
Compliant Powder Coating

Westbury Aluminum Railing powder coating is an uncompromising quality created by state-of-the-art technology. This is the highest quality powder coating on the market with a lifetime-limited warranty giving you peace of mind in your investment.

Note: 15% Upcharge for Silver with a minimum order.



1
The raw premium-grade aluminum is inspected to be free of blemishes and is not exposed to the outdoor elements.



2
The product enters a heated acidic cleaning stage to remove extrusion debris and fabrication oils.



3-6
First of three water rinses, ending in pure reverse osmosis water. Finishing with a dried-in-place aluminum sealer.



7-8
A 200 MPH air blast removes water drops from the pre-treated aluminum. A convection oven completes the dry-off process.



9
Powder is applied with 18 automated and 2 manual spray guns. Compressed process air is dried to -35°F Dew Point for superior adhesion.



10
The powder coating is then bonded and adhered to the aluminum substrate in a 400 degree cure stage.

Available Standard Colors

Satin Black

Black Fine Texture

Ninety Bronze

Bronze Fine Texture

Gloss Beige

Gloss White

White Fine Texture

Clay

Speckled Walnut

Sandy Shore

Chocolate

Silver



DSI is a PCI 4000 certified and verified AAMA 2604 and AAMA 2605 compliant powder coating applicator. The powder coating process is accredited by the American Architectural Manufacturing Association and the Powder Coating Institute. Our powder coating is custom blended from a Super Durable Polyester TGIC (Triglycidyl Isocyanurate) resin-base, using premium pigmentation to meet AAMA 2604 specifications. Our AAMA 2605 is a fluorocarbon polymer resin system.

VertiCable™ Accessories Featuring Westbury Brackets, Posts, Welded Corner, Caps, and Flairs

The finishing touch to your masterpiece... accessories. A variety of post sizes and wall thickness add strength, standard brackets combined with swivel mounts solving many unique scenarios, an option of post caps for a variety of looks finished off by the convenience of 2-piece and 1-piece post flairs create the Westbury Aluminum Railing accessories.


Brackets



Wall & Angle Swivel Mounts



Stair Mounts

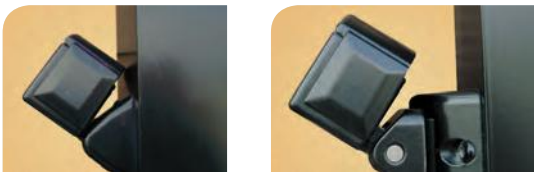

Stair Swivel Mounts




Top and Bottom Double Swivel Stair Mount



www.westburyrailing.com

Posts

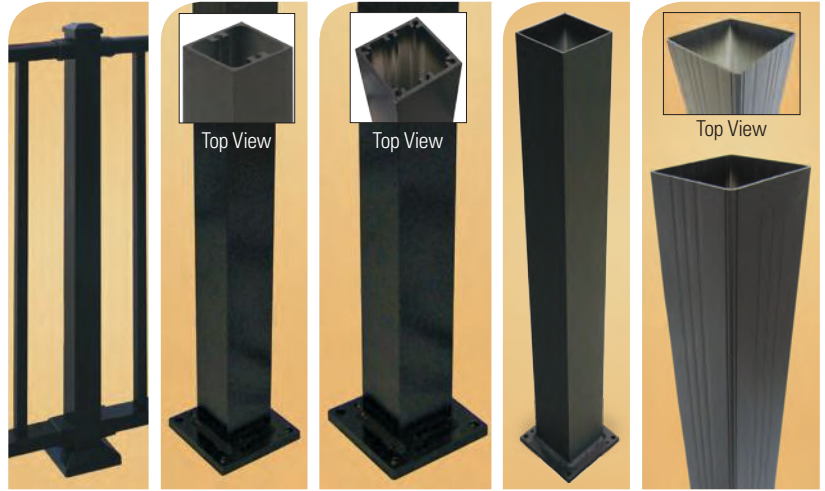

Residential 2"
Post (.090" wall)


2" Heavy Duty
Post*(.093" wall)

2-1/2" Power
Post*(.125" wall)

4" Smooth Post
(.125" wall)

4" & 6" Deco
Post (.090")

Accessories



2", 2-1/2" & 4" Post Flair (2-piece)
6" Post Flair (1-piece) available



Rail Support



Welded Corner



Flat Cap (2", 2-1/2", 4", 6")



Ball Cap (2", 2-1/2", 4")



MagenaStar Post Cap
Light (Low Voltage & Solar)

Crossovers



Corner Crossover Post



Stair Crossover Post



Level Crossover Post

*Testing Results - CCRR-0163 complies with IBC[†], IRC[‡], and FBC.
Note: Please check with local code authorities for requirements.



Made in the U.S.A.